



SUNRISE (HK) INTERNATIONAL CORP. LTD.

www.ledskylight.com

www.linksunrise.com

info@linksunrise.com



www.ledskylight.com

OFFICE CHINA

Room 2705AB Seg. Plaza,
Hua Qiang Road, Futian
District, Shenzhen, China.

OFFICE HONGKONG

Tel: +852-3960 6386, Fax: +852-3602 3111
51/F, Hopewell Center 183 Queen's Road
East Wanchai, Hong Kong

OFFICE USA

21011 Johnson Street Suite
110 Pembroke Pines 33029 UN


FACTORY

6F Building A. NO.1 TianYang
Er Rd. Datianyang SongGang
Bao'An District, Shenzhen, China



50W LED Street Light

Product Picture

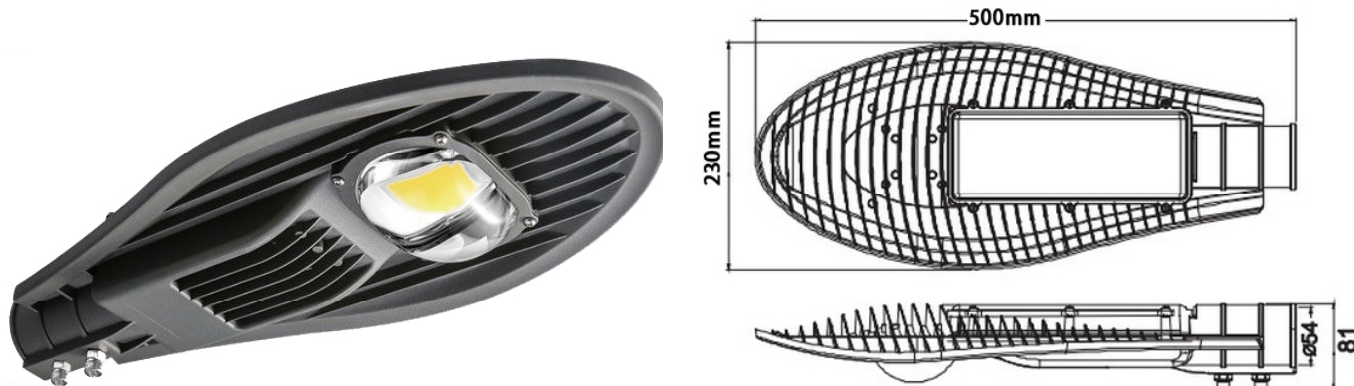

Product Features

Die casting housing, popular appearance
 Avoid dust accumulating, holes from top to bottom, rain will clear the dust
 Bigger heatsink surface, better cooling
 Holes will help air convection, help cool the heatsink
 Bridgelux/Cree chip LED sources
 IP65 waterproof
 Different power option, 50W 60W 80W 100W 150W
 Meanwell/Chinese Mainland brand driver
 Ra>70



Applications

- Street Lighting
- Pathway Lighting
- Parking Lot Lighting
- Security Lighting

Parameters

Item Number	Power	Input Voltage	Size(CM)	LED Chip	Ra	Color Temp.	Material
SR-ST50-02	50W	AC80-240V	50x23x9	Bridgelux/ Philips	>70	3000k/4000K 5000k/6500k	Aluminium
Lumens	LED Type	IP Rate	PF	Angle	Weight	Package Size	Warranty
4500-5500	COB	IP65	>0.9	120x70	2.8Kg	62x36x16cm	5years



Performance

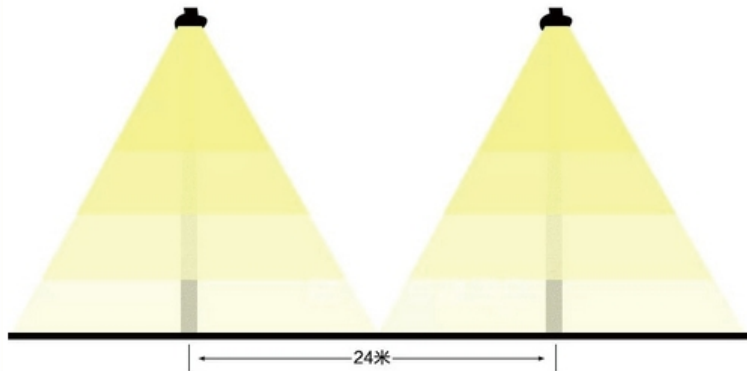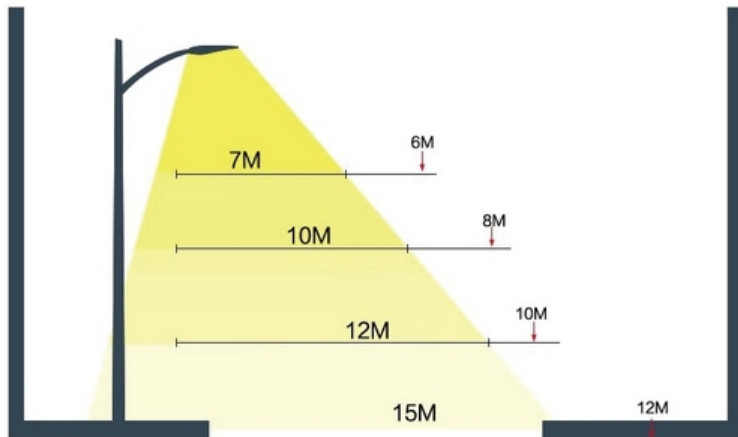

Distribution Curve

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

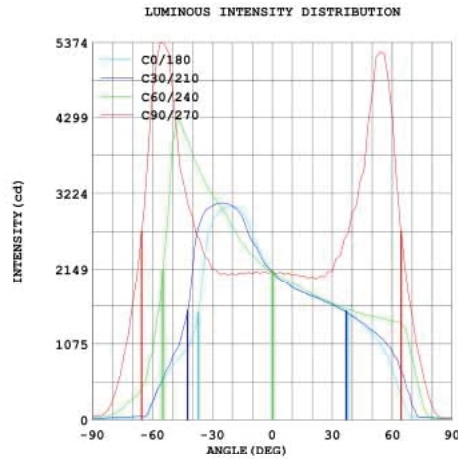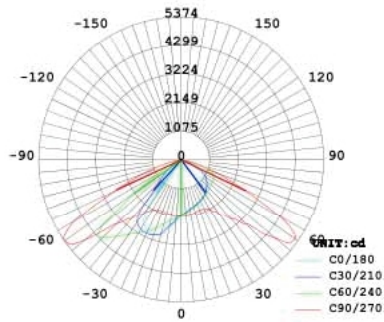

Structure



Installation

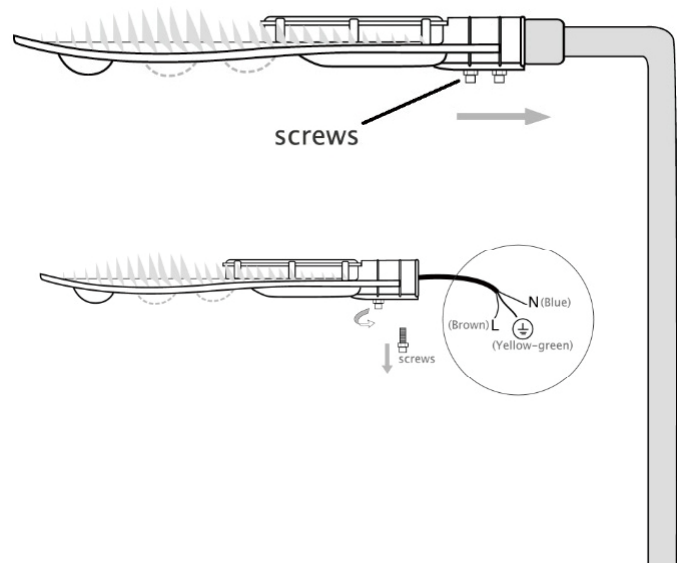


Note:

Don't install this product without professional guidance
Make the power had been cut off while installation

60W LED Street Light

Product Picture

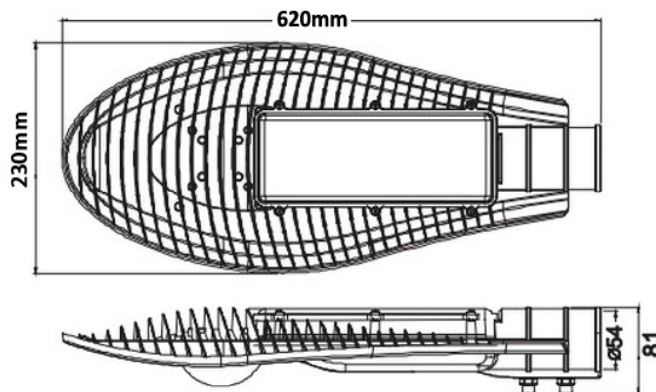

Product Features

Die casting housing, popular appearance
 Avoid dust accumulating, holes from top to bottom, rain will clear the dust
 Bigger heatsink surface, better cooling
 Holes will help air convection, help cool the heatsink
 Bridgelux/Cree chip LED sources
 IP65 waterproof
 Different power option, 50W 60W 80W 100W 150W
 Meanwell/Chinese Mainland brand driver
 Ra>70



Applications

- Street Lighting
- Pathway Lighting
- Parking Lot Lighting
- Security Lighting

Parameters

Item Number	Power	Input Voltage	Size(CM)	LED Chip	Ra	Color Temp.	Material
SR-ST60-02	60W	AC80-240V	62x26x9	Bridgelux/ Philips	>70	3000k/4000K 5000k/6500k	Aluminium
Lumens	LED Type	IP Rate	.PF	.5Angle	Weight	Package Size	Warranty
5500-6500	COB	IP65	>0.9	120x70	3.4Kg	70x36x16cm	5years



Performance

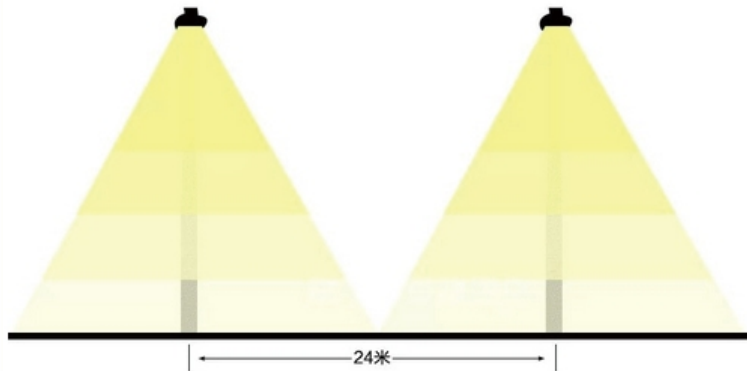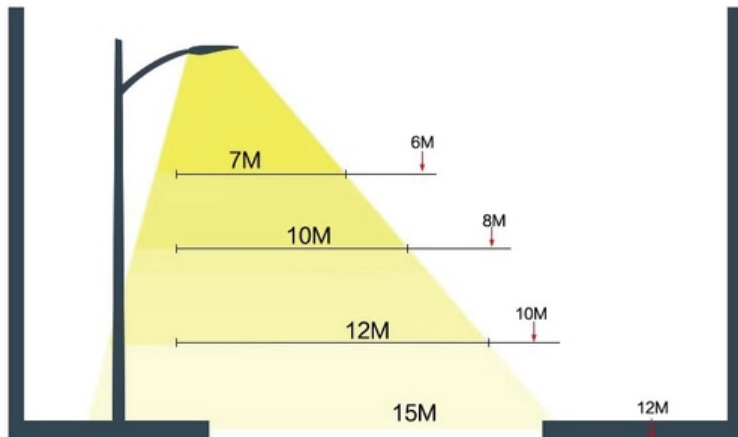

Distribution Curve

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

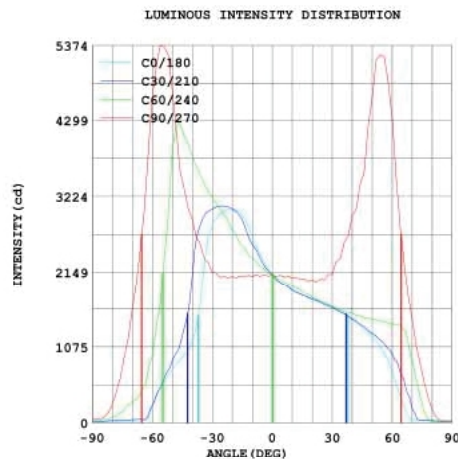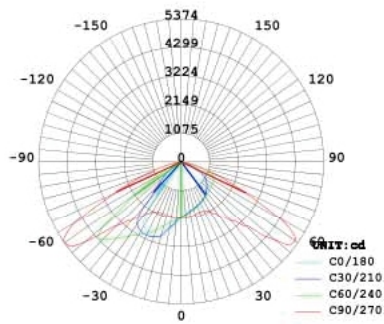

Structure



Installation

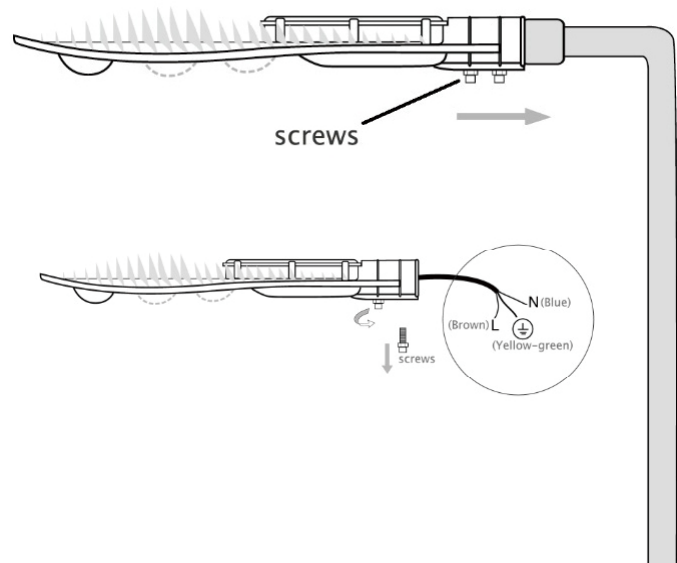


Note:

Don't install this product without professional guidance
Make the power had been cut off while installation

80W LED Street Light

Product Picture

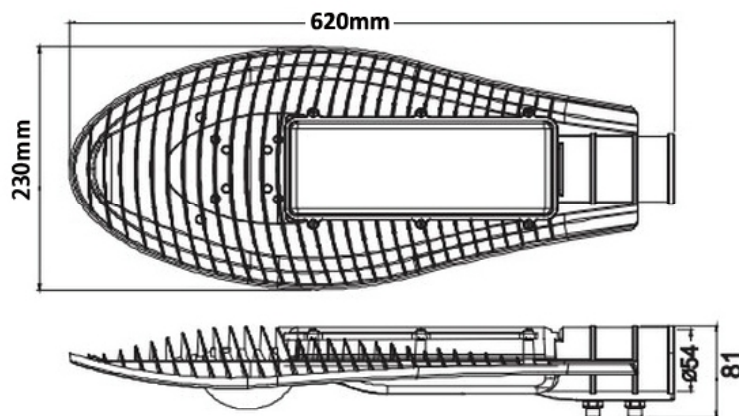

Product Features

Die casting housing, popular appearance
 Avoid dust accumulating, holes from top to bottom, rain will clear the dust
 Bigger heatsink surface, better cooling
 Holes will help air convection, help cool the heatsink
 Bridgelux/Cree chip LED sources
 IP65 waterproof
 Different power option, 50W 60W 80W 100W 150W
 Meanwell/Chinese Mainland brand driver
 Ra>70



Applications

- Street Lighting
- Pathway Lighting
- Parking Lot Lighting
- Security Lighting

Parameters

Item Number	Power	Input Voltage	Size(CM)	LED Chip	Ra	Color Temp.	Material
SR-ST80-02	80W	AC80-240V	62x26x9	Bridgelux/ Philips	>70	3000k/4000K 5000k/6500k	Aluminium
Lumens	LED Type	IP Rate	.PF	.5Angle	Weight	Package Size	Warranty
7500-8500	COB	IP65	>0.9	120x70	3.5Kg	70x36x16cm	5years



Performance

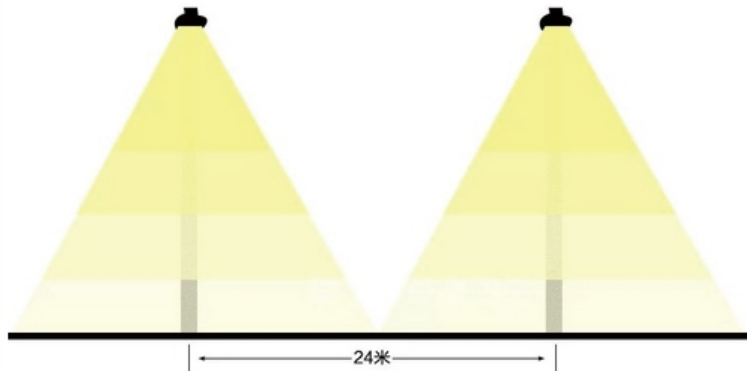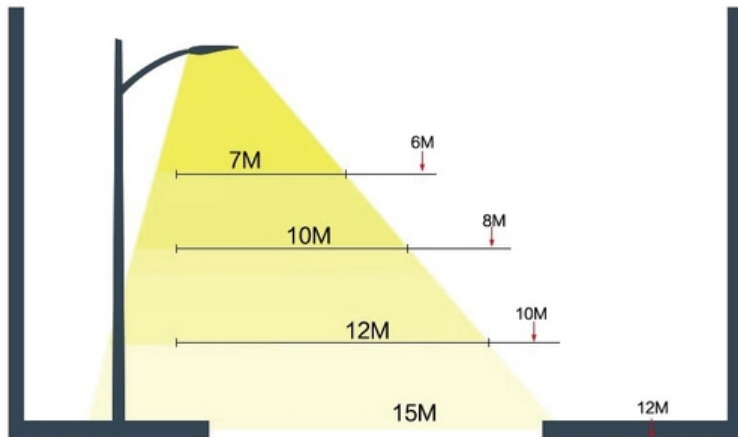

Distribution Curve

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS


INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

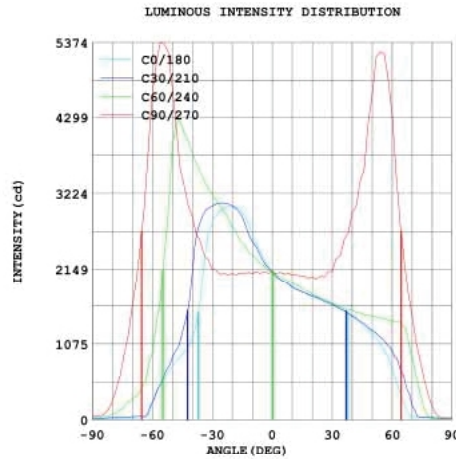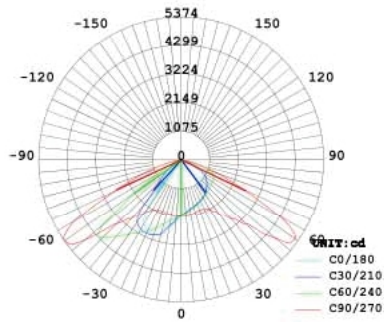

Structure



Installation

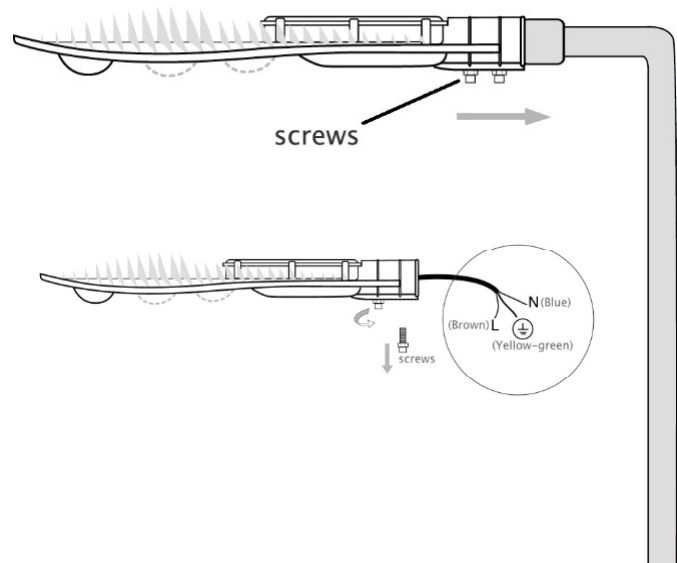


Note:

Don't install this product without professional guidance
Make the power had been cut off while installation

100W LED Street Light

Product Picture

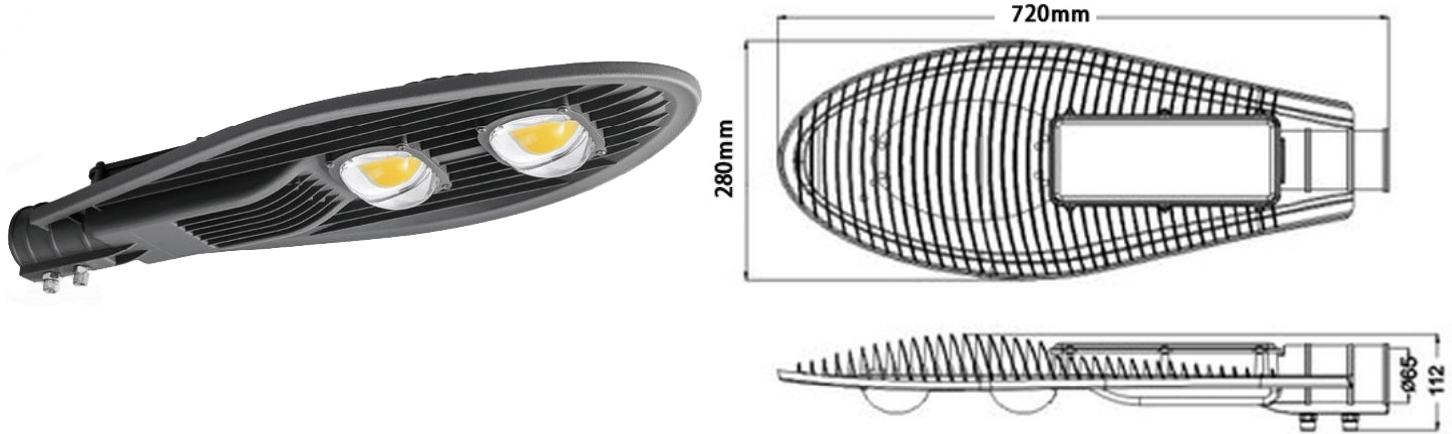

Product Features

Die casting housing, popular appearance
 Avoid dust accumulating, holes from top to bottom, rain will clear the dust
 Bigger heatsink surface, better cooling
 Holes will help air convection, help cool the heatsink
 Bridgelux/Cree chip LED sources
 IP65 waterproof
 Different power option, 50W 60W 80W 100W 150W
 Meanwell/Chinese Mainland brand driver
 Ra>70


Applications

- Street Lighting
- Pathway Lighting
- Parking Lot Lighting
- Security Lighting


Parameters

Item Number	Power	Input Voltage	Size(CM)	LED Chip	Ra	Color Temp.	Material
SR-ST100-02	100W	AC80-240V	72x28x11	Bridgelux/ Philips	>70	3000k/4000K 5000k/6500k	Aluminium
Lumens	LED Type	IP Rate	PF	Angle	Weight	Package Size	Warranty
9500-10500	COB	IP65	>0.9	120x70	5.5Kg	78x28x18cm	5years

Performance

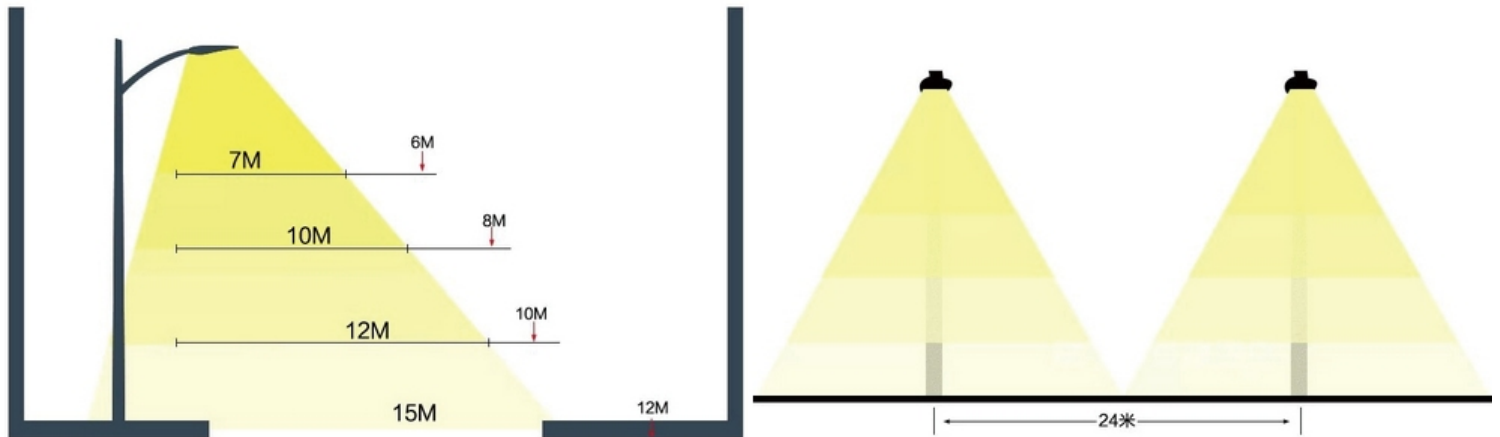


Distribution Curve

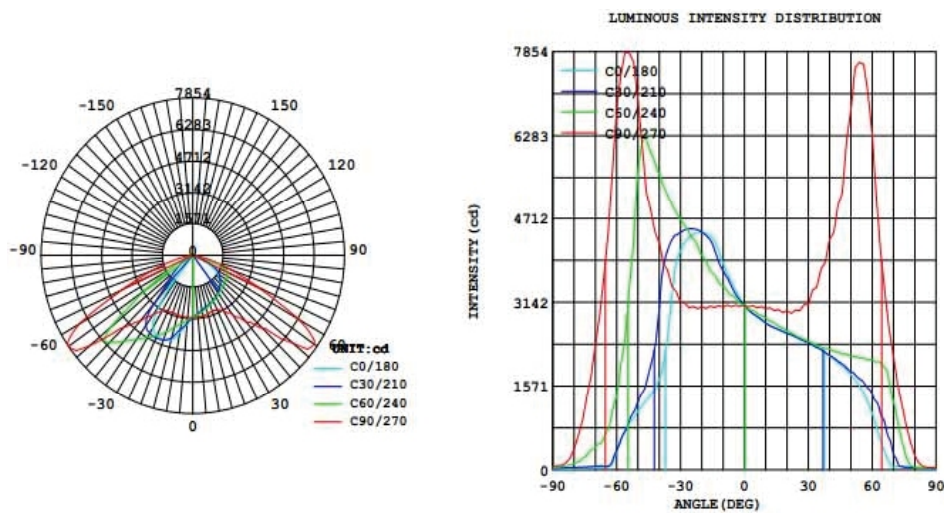

Structure



Installation

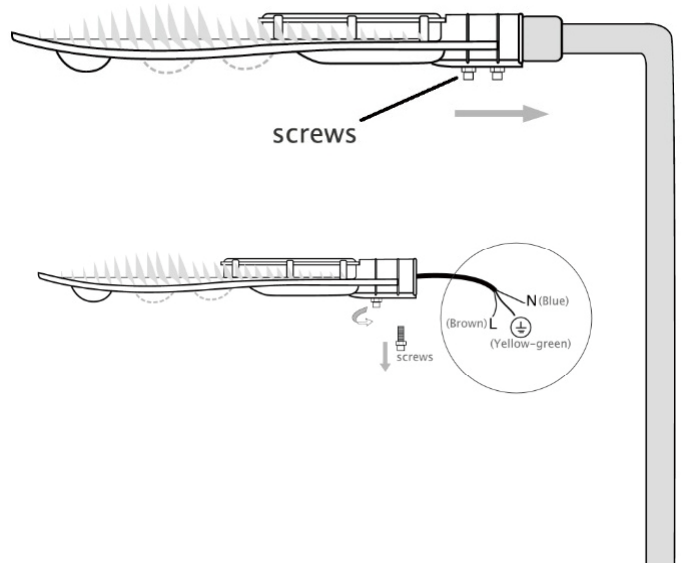


Note:

Don't install this product without professional guidance
Make the power had been cut off while installation

150W LED Street Light

Product Picture

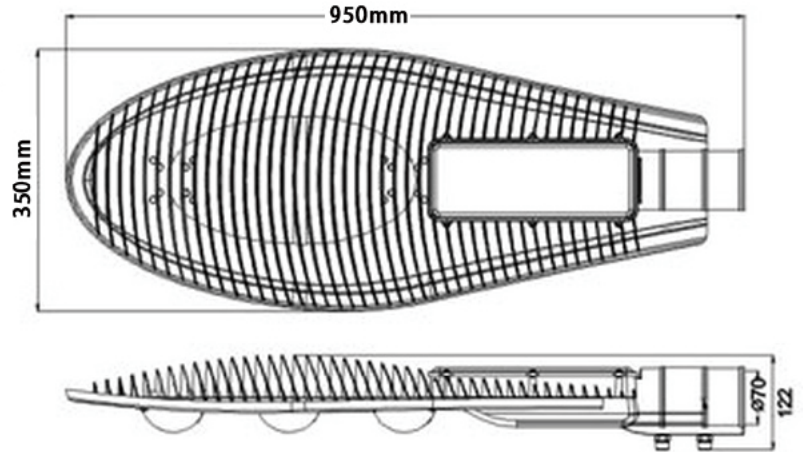

Product Features

Die casting housing, popular appearance
 Avoid dust accumulating, holes from top to bottom, rain will clear the dust
 Bigger heatsink surface, better cooling
 Holes will help air convection, help cool the heatsink
 Bridgelux/Cree chip LED sources
 IP65 waterproof
 Different power option, 50W 60W 80W 100W 150W
 Meanwell/Chinese Mainland brand driver
 Ra>70


Applications

- Street Lighting
- Pathway Lighting
- Parking Lot Lighting
- Security Lighting


Parameters

Item Number	Power	Input Voltage	Size(CM)	LED Chip	Ra	Color Temp.	Material
SR-ST150-02	150W	AC80-240V	95x35x12	Bridgelux/ Philips	>70	3000k/4000K 5000k/6500k	Aluminium
Lumens	LED Type	IP Rate	PF	Angle	Weight	Package Size	Warranty
14500-15500	COB	IP65	>0.9	120x70	7.6Kg	110x36x16cm	5years

Performance

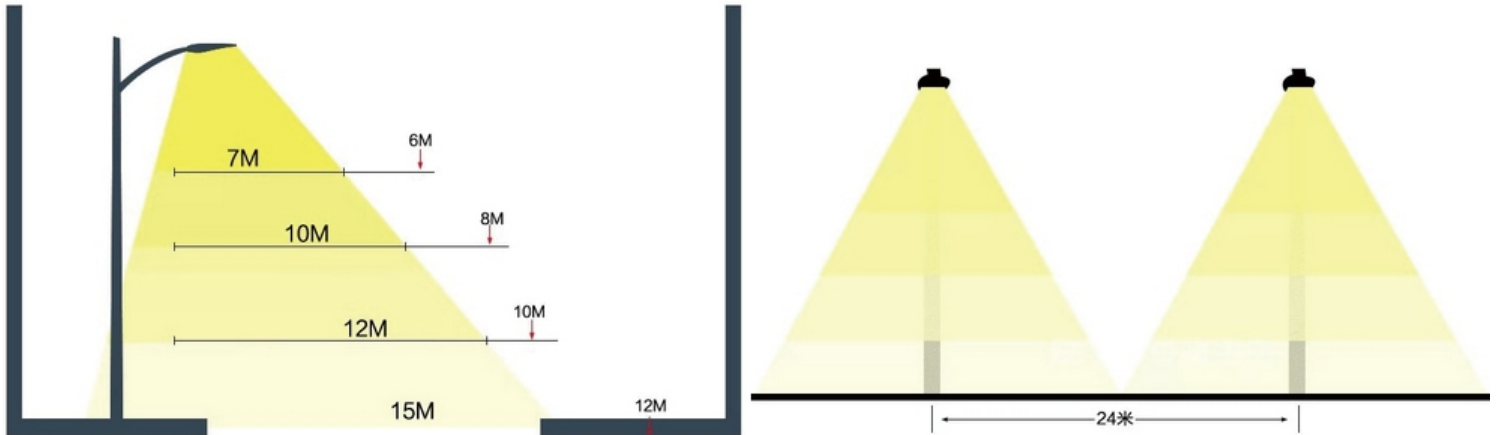


Distribution Curve

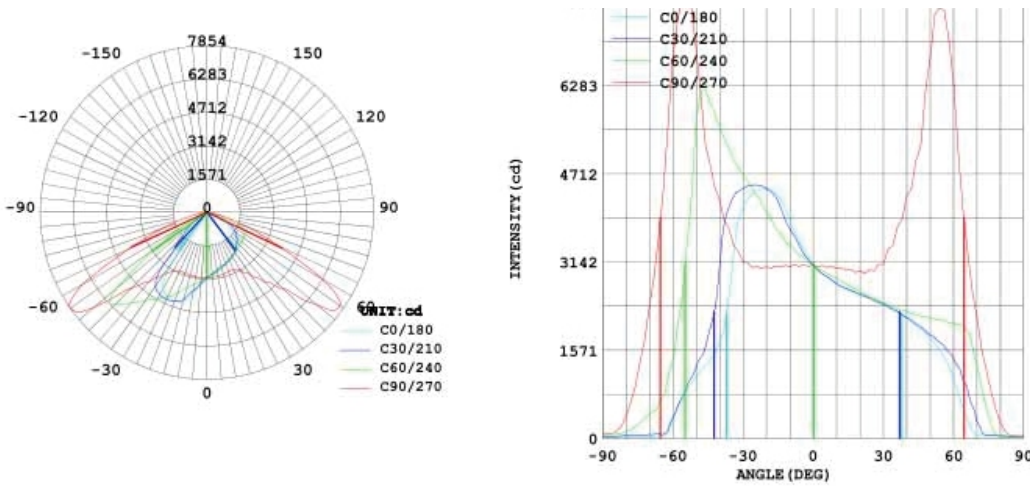

Structure



Installation

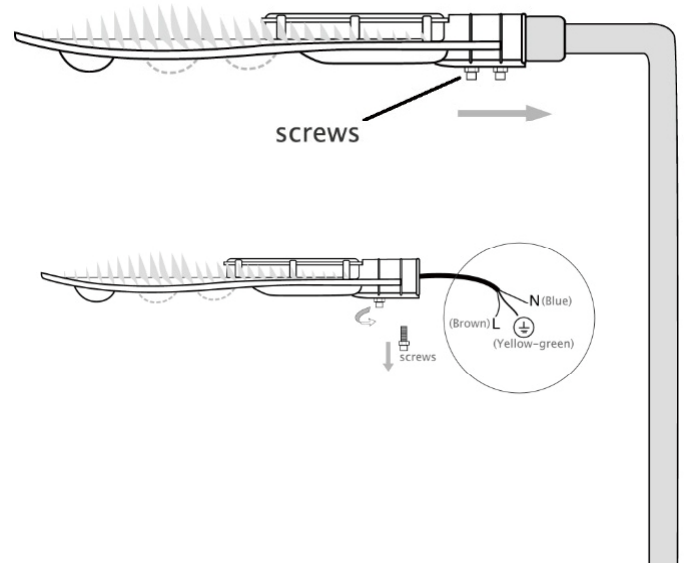


Note:

Don't install this product without professional guidance
Make the power had been cut off while installation

200W LED Street Light

Product Picture

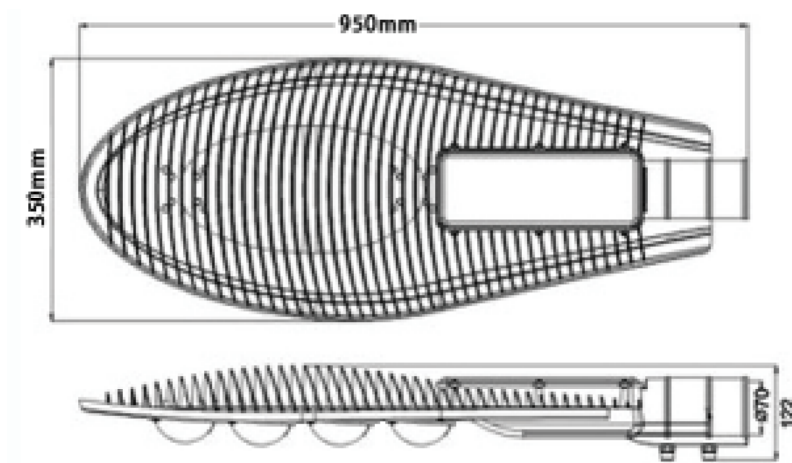

Product Features

Die casting housing, popular appearance
 Avoid dust accumulating, holes from top to bottom, rain will clear the dust
 Bigger heatsink surface, better cooling
 Holes will help air convection, help cool the heatsink
 Bridgelux/Cree chip LED sources
 IP65 waterproof
 Different power option, 50W 60W 80W 100W 150W
 Meanwell/Chinese Mainland brand driver
 Ra>70


Applications

- Street Lighting
- Pathway Lighting
- Parking Lot Lighting
- Security Lighting


Parameters

Item Number	Power	Input Voltage	Size(CM)	LED Chip	Ra	Color Temp.	Material
SR-ST200-02	200W	AC80-240V	95x35x12	Bridgelux/ Philips	>70	3000k/4000K 5000k/6500k	Aluminium
Lumens	LED Type	IP Rate	PF	Angle	Weight	Package Size	Warranty
19500-20500	COB	IP65	>0.9	120x70	8.6Kg	110x36x16cm	5years

Performance

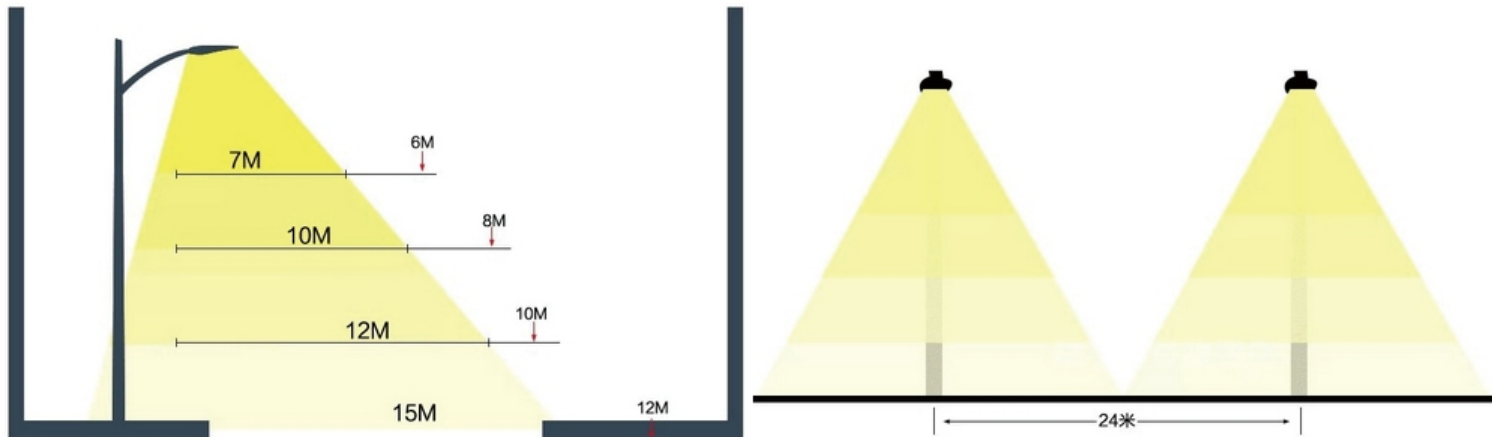


Distribution Curve

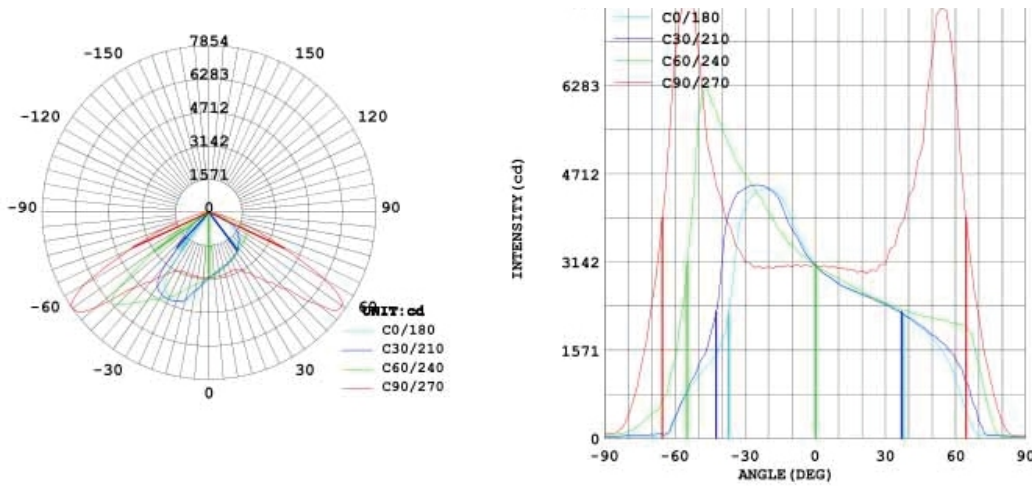

Structure



Installation

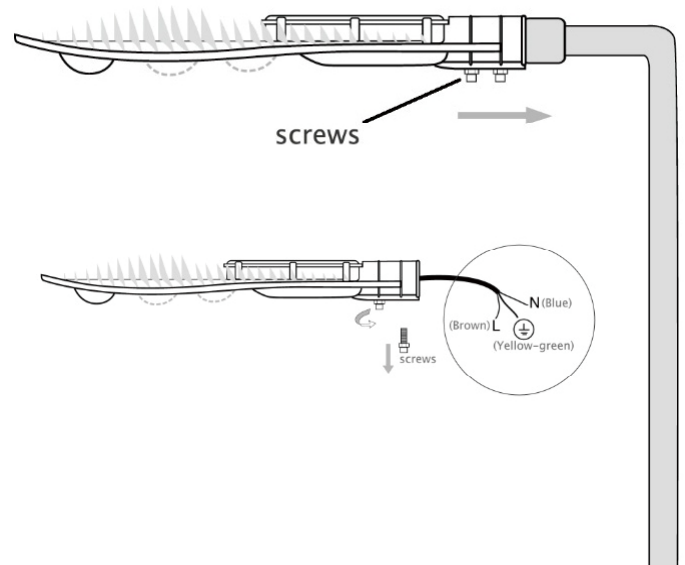

Note:
Don't install this product without professional guidance
Make the power had been cut off while installation